

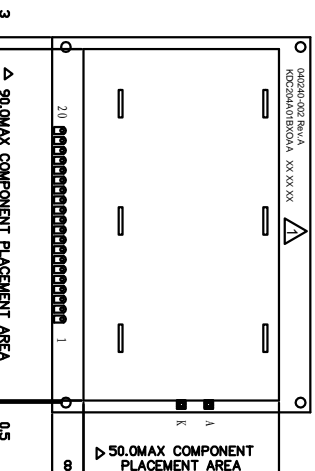


VER.	description	DATE(Remarkd)
1.0	The 1st issue	2006-02-23(#3)
2.0	The 2nd issue(Add the spray-NO on the PCB.)	2006-03-18(#3)

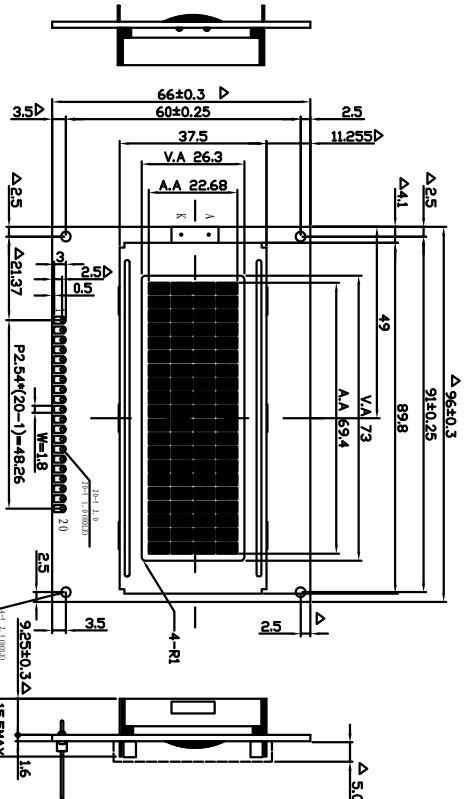


PIN	SYMBOL	PIN	SYMBOL
1	VSS	16	NC
2	VDD	17	NC
3	VADJ	18	FGND*
4	REGSEL	19	LED+
5	RD/-WR	20	LED-
6	EN	21	
7	D0	22	
8	D1	23	
9	D2	24	
10	D3	25	
11	D4	26	
12	D5	27	
13	D6	28	
14	D7	29	
15	VSS	30	

SPEC.

- 1) THE LCM : LCD+COB IC+RUBBER+PIN+B/L+PCB
- 2) LCD TYPE : STN(Y-G), TRANSMISSIVE, POSITIVE
- 3) VIEWING DIRECTION : 6 O'CLOCK
- 4) DRIVE METHOD & VOLTAGE : 1/16DUTY, 1/4BAIS, Vop=3.95V, VDD=5V
- 5) BEZEL : SPC, 电着黑 THICKNESS=0.5
- 6) BACKLIGHT : ARRAY B/L(Y-G,Vf=7.0V,If=680MA)
- 7) PCB TYPE : FR-4,H=1.6
- 8) OPERATING TEMP : -20°C - +70°C
- 9) STORAGE TEMP : -30°C - +80°C
- 10) CONNECTOR : PIN
- 11) DRIVER IC : ST7066+ST7063*2
- 12) Input Data : Parallel(6800)
- 13) ROHS Requested: YES
- 14) UNMARKED TOLERANCE±0.3MM

注: 以上打三角符号的为重要尺寸, 请量产时注意

LCD LAYOUT

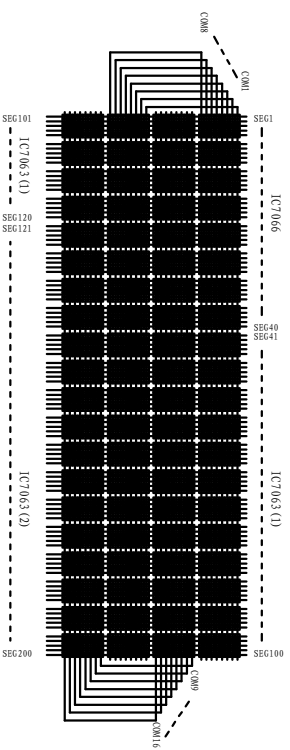

		UNIT	SIZE	SCALE	DESIGNED	CHECKED	VERIFIED	APPROVED	Outline		
		mm	A4	FIT	2006/03/18	2006/03/20	2006/03/20	2006/03/20			
MODULE NO.	KDC204A01BX0AA	LCD No.	AMX-2152-AYZM	DESIGNED	张立英	CHECKED	刘德付	VERIFIED	刘德付	APPROVED	向明胜
Customer No.	040240-002	FILE NAME									